


## CORREIAS PERFIL "V" - SHC - 5V

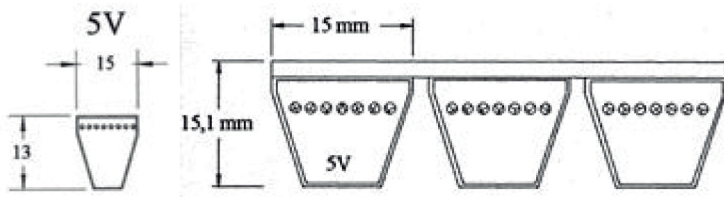

<b>LI</b>	Comprimento Interno da Correia
<b>LW</b>	Comprimento nos Cordonéis da Correia
<b>LA</b>	Comprimento Externo da Correia

Referência	Circunferência Externa (Pol.)	Circunferência Externa (MM.)
5V-500	50,0	1270
5V-530	53,0	1345
5V-560	56,0	1420
5V-600	60,0	1525
5V-630	63,0	1600
5V-670	67,0	1700
5V-710	71,0	1805
5V-750	75,0	1905
5V-800	80,0	2030
5V-850	85,0	2160
5V-900	90,0	2285
5V-950	95,0	2415
5V-1000	100,0	2540
5V-1060	106,0	2690
5V-1120	112,0	2845
5V-1180	118,0	2995
5V-1250	125,0	3175
5V-1320	132,0	3355
5V-1400	140,0	3555
5V-1500	150,0	3810
5V-1600	160,0	4065
5V-1700	170,0	4320
5V-1800	180,0	4570
5V-1900	190,0	4825
5V-2000	200,0	5080
5V-2120	212,0	5385
5V-2240	224,0	5690
5V-2360	236,0	5995
5V-2500	250,0	6350
5V-2650	265,0	6730
5V-2800	280,0	7110
5V-3000	300,0	7620
5V-3150	315,0	8000
5V-3350	335,0	8510
5V-3550	355,0	9017