


## CORREIAS PERFIL "V" - SHC - 8V

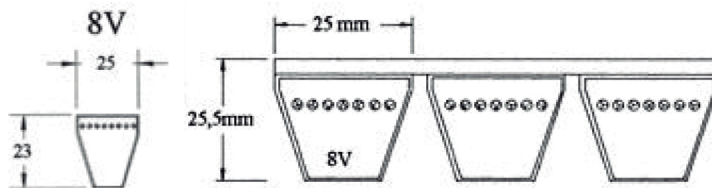

<b>LI</b>	Comprimento Interno da Correia
<b>LW</b>	Comprimento nos Cordonéis da Correia
<b>LA</b>	Comprimento Externo da Correia

Referência	Circunferência Externa (Pol.)	Circunferência Externa (MM.)
8V-1000	100,0	2540
8V-1060	106,0	2690
8V-1120	112,0	2845
8V-1180	118,0	2995
8V-1250	125,0	3175
8V-1320	132,0	3355
8V-1400	140,0	3555
8V-1500	150,0	3810
8V-1600	160,0	4065
8V-1700	170,0	4320
8V-1800	180,0	4570
8V-1900	190,0	4825
8V-2000	200,0	5080
8V-2120	212,0	5385
8V-2240	224,0	5690
8V-2360	236,0	5995
8V-2500	250,0	6350
8V-2650	265,0	6730
8V-2800	280,0	7110
8V-3000	300,0	7620
8V-3150	315,0	8000
8V-3350	335,0	8510
8V-3550	355,0	9017
8V-3750	375,0	9525
8V-4000	400,0	10160
8V-4250	425,0	10795
8V-4500	450,0	11430
8V-4750	475,0	12065
8V-5000	500,0	12700
8V-5600	560,0	14225